



## Ø 75 mm Fibre round

Typ: Dynabrade Mod 52413 15000 rpm

Användning: Grinding, polishing in difficult placec to get at.

Suction need: 200 m<sup>3</sup>/h

Suction hose: dia 32 mm

In running order machine art nr: 450102


Attachment kit art nr: 403361

Delar i kåpsats: 911360 Screw SK6SS M5x8, 3 st  
 990220 Socket head cap key 2,5 mm, 1 st  
 301260 Manifold Grasso SV27/150, 1 st  
 272180 Tray to Manifold 301260, 1 st  
 272190 Sectorplate, 1 st  
 509160 Distancenut height 10,5 mm

271020 Supporting round 65 mm, 1 st  
 911250 Screw MFX-H 5x10 fzb,1st  
 272991 Adapter mod 52413, 1 st  
 911060 Screw MCS 5x10 fzb, 2 st  
 910970 Screw MCS 4x6 fzb, 2 st

Accessories: 490010, Top of the round

Hose set art nr: 272430

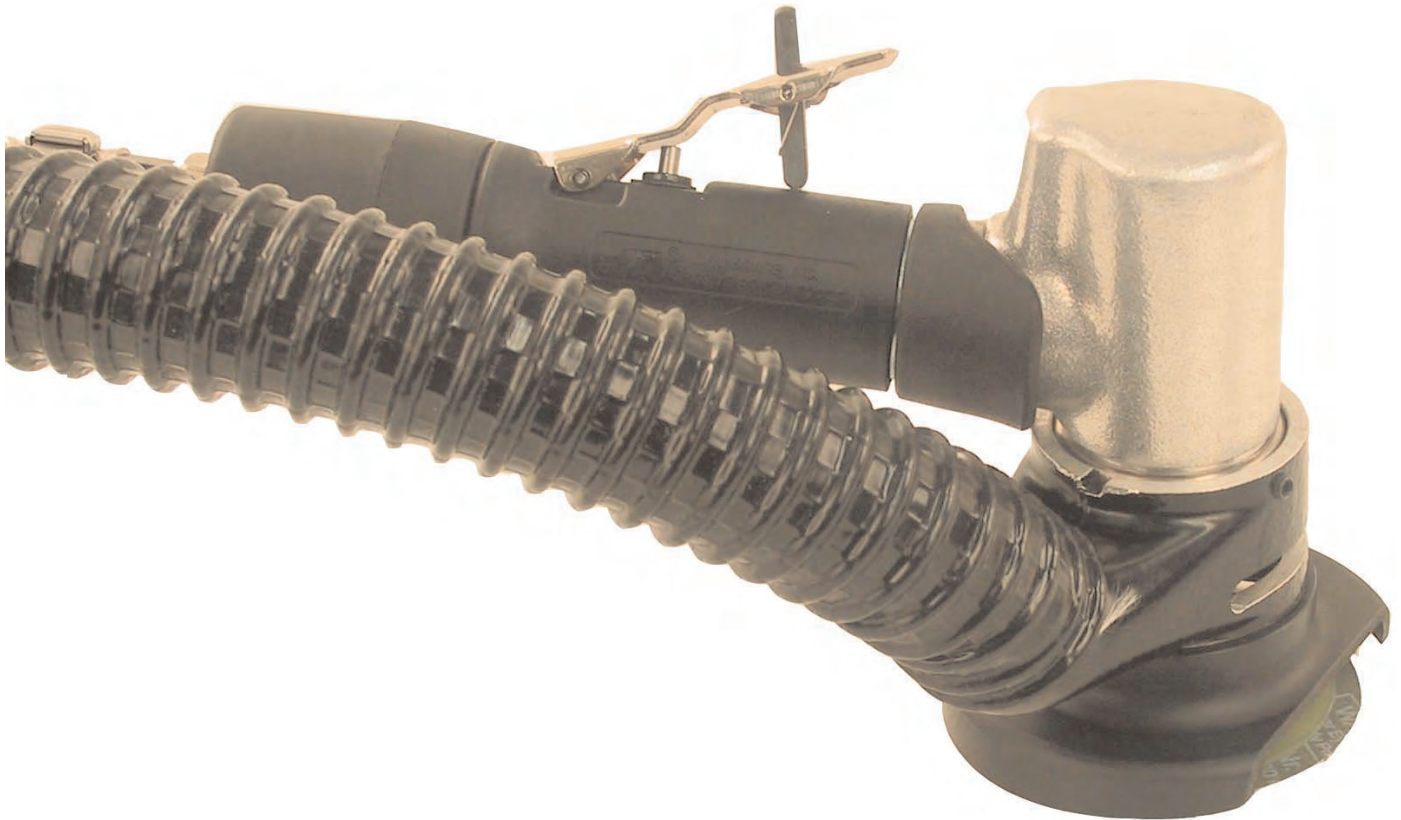


**Type: Dynabrade 52413**  
**Applications: Light Sanding**

**Suction requirement: 200 m<sup>3</sup>/h**

**Vacuum hose: ø 32 mm**

**Attachment kit Art.No:** 403363 White original pad  
403364 White special disc head  
**Parts in attachment kit:** 307870 Manifold incl screw  
990220 Hexagon wrench  
278295 Nozzle  
490010 Disc head  
509160 Distance nut  
271020 Backin up disc dia 65 mm  
911250 Screw MFX-H M5 x 10

**Accessories:**  
**Hose kit Art.No:** 272430

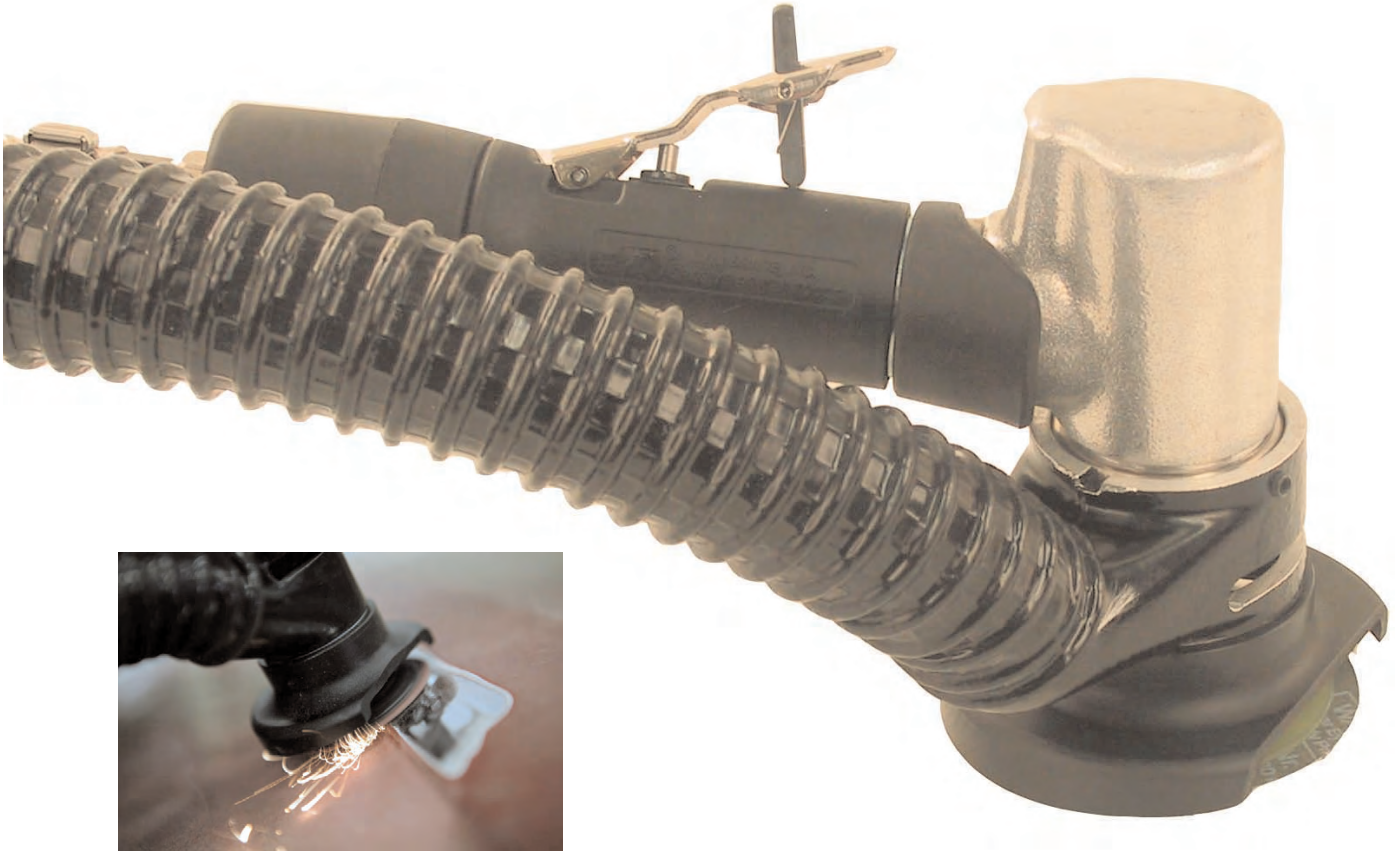

## Ø 75 mm Sanding disc

Type: Dynabrade 52413  
Applications: Light Sanding  
Suction requirement: 200 m<sup>3</sup>/h  
Vacuum hose: ø 32 mm

Attachment kit Art.No: 403363 With original pad

Parts in attachment kit: 307870 Manifold incl screws  
990220 Hexagon wrench  
278295 Nozzle




Accessories:

Hose kit Art.No: 272430

403364 With special disc head

307870 Manifold incl screws  
990220 Hexagon wrench  
278295 Nozzle  
490010 Disc head  
509160 Distance nut  
271020 Backing up disc dia 65 mm  
911250 Screw MFX-H M5 x 10

272430

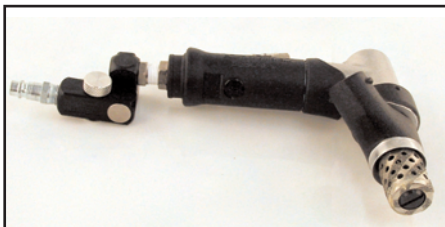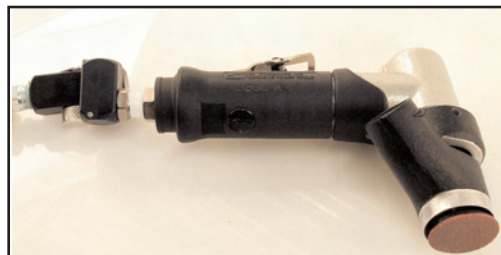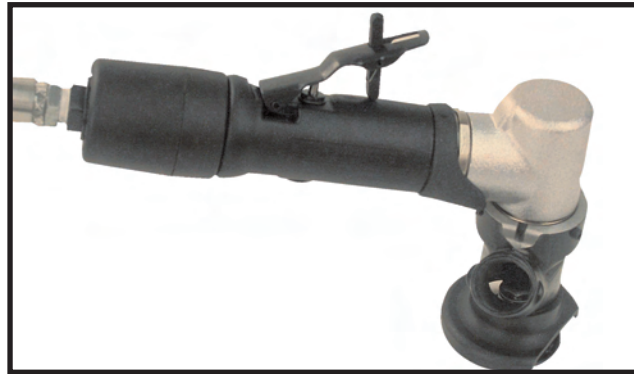

## Ø 50 mm Sanding disc

**OBS! Use pads with 1/4" male. Threaded to 1/4" diameter shank.**

Type: Dynabrade Mod 52251 25.000 rpm

Applications: Grinding and polishing at difficult to get, places

Suction requirement: 125 m<sup>3</sup>/h

Vacuum hose: ø 25 mm

Attachment kit Art.No: 403370

Parts in attachment kit: 30 27 20 cap incl screws  
99 02 20 Hex key  
27 82 90 Nozzle  
99 02 20 Hexagon wrench

Accessories: 278291 Nozzle 15 (max 18000)  
278296 Nozzle for mounted points

Hose kit Art.No: 272420



## Ø 125 mm Fibre disc

Type: Dynabrade mod 50304

Applications: Grinding and sanding of metal, plastic, wood, paint etc.

Suction requirement: 250 m<sup>3</sup>/h

Vacuum hose: ø 38 mm

Attachment kit Art.No: 409130

Parts in attachment kit:

- 312230 Manifold incl screws
- 990220 Hexagon wrench 2,5 mm
- 265020 Push fit hood with brush
- 271030 Backing up disc
- 272130 Spacer 3 mm
- 272160 Spacer 12 mm
- 272200 Flanged nut

Accessories: 990271 Pin key

Hose kit Art.No: 273260



## Ø 115 Fiber disc

Type: Dynabrade 52516 15000 rpm

Applications: Grinding and sanding of metal, plastic, wood, paint etc

Suction requirement: 250 m<sup>3</sup>/h

Vacuum hose: ø 38

Attachment kit Art.No: 409270

Parts in attachment kit: 312120 Manifold incl screws  
265020 Push fit hood with brush  
990220 Hexagon wrench

Accessories:

Hose kit Art.No: 273260



## Ø 115 Fiber disc

Type: Dynabrade 52516 15000 rpm

Applications: Grinding and sanding of metal, plastic, wood, paint etc

Suction requirement: 250 m<sup>3</sup>/h

Vacuum hose: ø 38

Attachment kit Art.No: 409270

Parts in attachment kit: 312120 Manifold incl screws  
265020 Push fit hood with brush  
990220 Hexagon wrench

Accessories:

Hose kit Art.No: 273260



## Ø 125 mm Depressed centre wheel

Type: Dynabrade 50306

Applications: Grinding of weld joints, sheet metal, castings, concrete etc

Suction requirement: 250 m<sup>3</sup>/h

Vacuum hose: ø 38 mm

Attachment kit Art.No: 409280

Parts in attachment kit:

- 313380 Manifold incl screws
- 990220 Hexagon wrench
- 272643 Steel wheel guard compl.
- 250020 Push fit hood

(Use original flanged nut)

Accessories:

Hose kit Art.No: 273260





## Ø 125 mm Fibre disc

**Type:** Dynabrade 50306

**Applications:** Grinding and sanding of metal, plastics, wood, paint etc.

**Suction requirement:** 250 m<sup>3</sup>/h

**Vacuum hose:** ø 38 mm

**Attachment kit Art.No:** 409281

**Parts in attachment kit:**

- 313380 Manifold incl screws
- 990220 Hexagon wrench
- 265020 Push fit hood with brush
- 271030 Backin up disc
- 272670 Flanged nut 5/8" H13

**Accessories:** 990271 Pin key

**Hose kit Art.No:** 273260



**Ø 180 mm Depressed center wheel**

**Type: Dynabrade 52563**

**Applications: Grining of weld joints, sheet metal, castings concrete etc**

**Suction requirement: 250 m<sup>3</sup>/h**

**Vacuum hose: ø 38 mm**

**Attachment kit Art.No: 409282**

**Parts in attachment kit:**  
313380 Manifold incl screws  
990220 Hexagon wrench  
272650 Steel wheel guard compl.  
250010 Push fit hood  
(use original flanged nut)

**Accessories:**

**Hose kit Art.No: 273260**



## Ø 180 mm Fibre disc

Type: Dynabrade 52563

Applications: Grining and sanding of metal, plastics, wood, paint etc.

Suction requirement: 250 m<sup>3</sup>/h

Vacuum hose: ø 38 mm

Attachment kit Art.No: 409283

Parts in attachment kit:

- 313380 Manifold incl screws
- 990220 Hexagon wrench
- 267500 Push fit hood with brush
- 271060 Backin up disc
- 272670 Flanged nut 5/8" H13

Accessories: 990271 Pin key

Hose kit Art.No: 273260